


50A 40V P-channel Enhancement Mode Power MOSFET

1 Description

DHP50P04 is an P-channel enhancement mode power field-effect transistor. Used advanced trench technology design, provided excellent $R_{DS(on)}$ and low gate charge. The package form is SOP-8. Which accords with the RoHS standard.

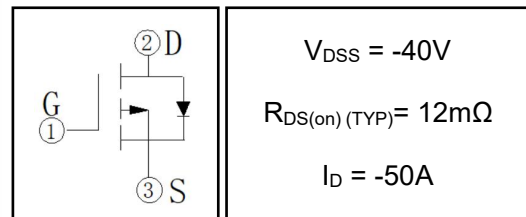


2 Features

- Low on resistance
- Low gate charge
- Fast switching
- Low reverse transfer capacitances
- 100% single pulse avalanche energy test
- 100% ΔV_{DS} test

3 Applications

- Switching power supply
- DC-DC converters
- Load switching
- Inverter power management system
- Automotive electronics applications

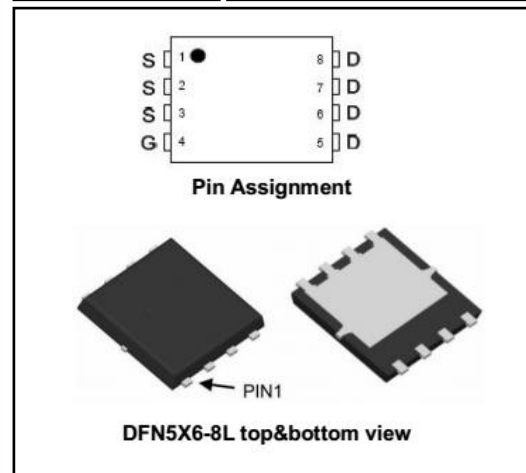

4 Electrical Characteristics

4.1 Absolute Maximum Rating ($T_C=25^\circ C$, unless otherwise noted)

Parameter	Symbol	Rating	Units
Drain-to-Source Voltage	V_{DSS}	-40	V
Gate-to-Source Voltage	V_{GSS}	± 20	V
Continuous Drain Current	I_D	$T_C=25^\circ C$	-50
		$T_C=100^\circ C$	-35
Pulsed Drain Current ⁽¹⁾	I_{DM}	-150	A
Single Pulse Avalanche Energy ⁽⁴⁾	E_{AS}	196	mJ
Avalanche Current ⁽⁴⁾	I_{AR}	-28	A
Power Dissipation	$T_a=25^\circ C$	P_{tot}	75
Junction Temperature Range	T_j	-55~150	$^\circ C$
Storage Temperature Range	T_{stg}	-55~150	$^\circ C$
High Temperature(tin solder)	T_L	260	$^\circ C$

4.2 Thermal Characteristics

Parameter	Symbol	Rating	Unit
Thermal Resistance, Junction to Ambient	R_{thJA}	1.67	$^\circ C/W$





4.3 Electrical Characteristics (T_c=25°C, unless otherwise noted)

Parameter	Symbol	Test Condition	Value			Units
			Min	Typ	Max	
Off Characteristics						
Drain-to-Source Breakdown Voltage	BV _{DSS}	I _D =-250μA, V _{GS} =0V	-40	-43	--	V
Drain-to-Source Leakage Current	I _{DSS}	V _{DS} =-40V, V _{GS} =0V, T _C =25°C	--	--	-1	μA
		V _{DS} =-32V, V _{GS} =0V, T _C =125°C	--	--	-100	μA
Gate-to-Source Leakage Current	I _{GSS}	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
On Characteristics						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =-250μA	-1	-1.6	-3	V
Drain-to-Source on-state Resistance	R _{DS(on)}	V _{GS} =-4.5V, I _D =-12A	10	13	21	mΩ
		V _{GS} =-10V, I _D =-24A	8	10	14.5	mΩ
Forward Transfer Conductance	g _{fs}	V _{DS} =-15V, I _D =-10A	--	14	--	S
Dynamic Characteristics						
Input Capacitance	C _{iss}	V _{GS} =0V, V _{DS} =-20V, f=1.0MHz	--	2720	--	pF
Output Capacitance	C _{oss}		--	269	--	
Reverse Transfer Capacitance	C _{rss}		--	240	--	
Switching Characteristics						
Turn-on Delay Time	t _{d(on)}	V _{DS} =-15V, V _{GS} =-10V, R _L =15Ω, R _G =6Ω	--	76	--	nS
Turn-on Rise Time	t _r		--	43	--	
Turn-off Delay Time	t _{d(off)}		--	436	--	
Turn-off Fall Time	t _f		--	113	--	
Total Gate Charge	Q _g	I _D =-12A, V _{DS} =-20V, V _{GS} =-4.5V	--	28.9	--	nC
Gate-to-Source Charge	Q _{gs}		--	10	--	
Gate-to-Drain("Miller") Charge	Q _{gd}		--	13.2	--	
Drain-Source Diode Characteristics						
Diode Forward Voltage ⁽³⁾	V _{FSD}	V _{GS} =0V, I _S =-25A	--	-0.88	-1.2	V
Diode Forward Current	I _S		--	--	-50	A





Notes:

- 1: Repetitive rating, pulse width limited by maximum junction temperature.
- 2: Surface mounted on FR4 Board, t_s≤10sec.
- 3: Pulse width ≤ 300μs, duty cycle ≤ 2%.
- 4: L=0.5mH, I_D=-28A, V_{DD}=-32V, V_{GATE}=-40V, Start T_J=25°C.


5 Typical characteristics diagrams

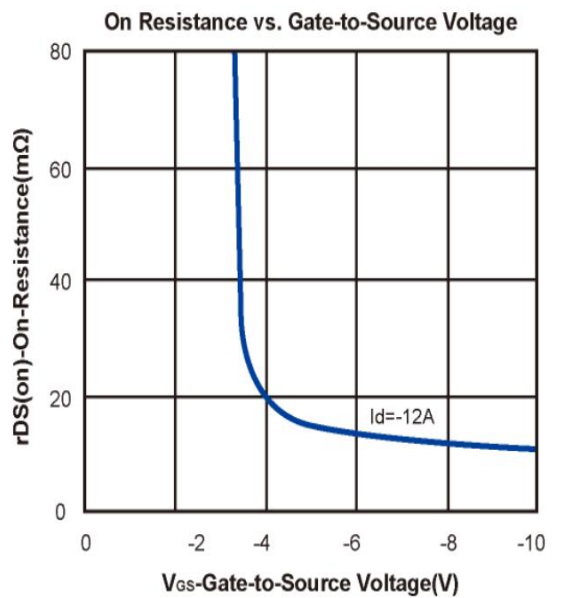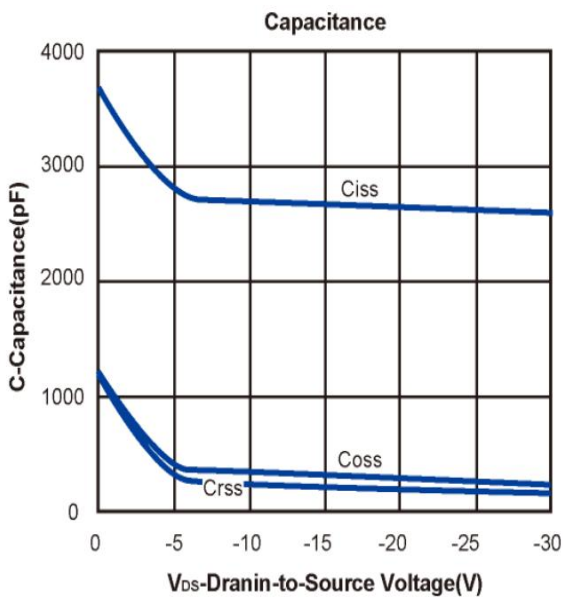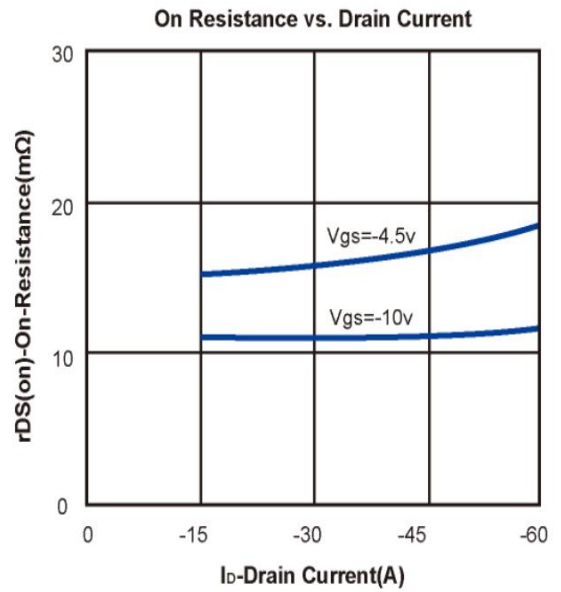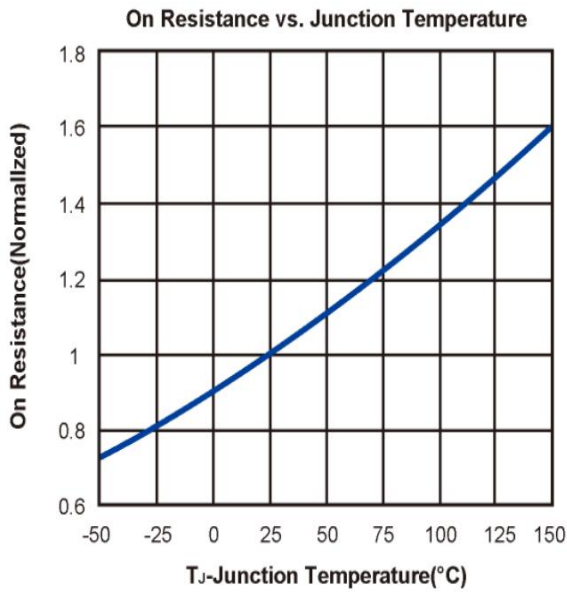


5 Typical characteristics diagrams(continues)

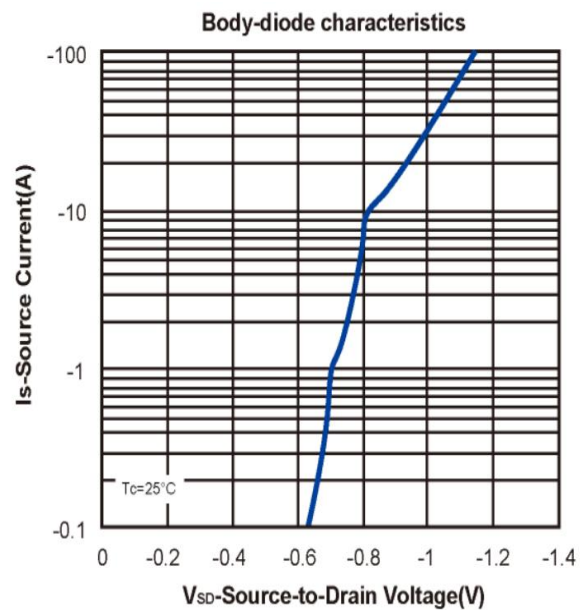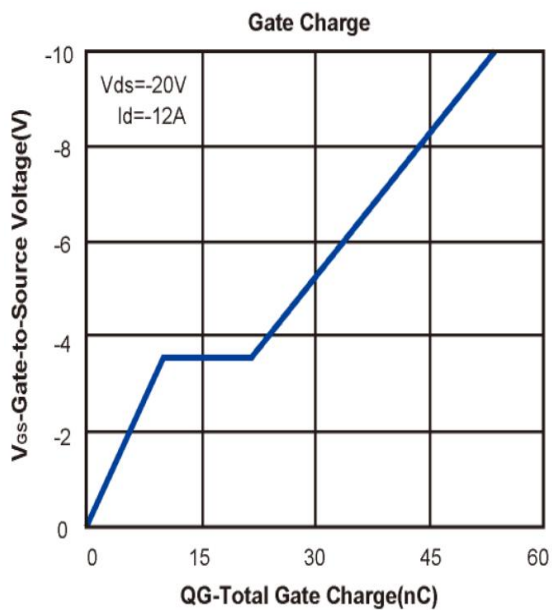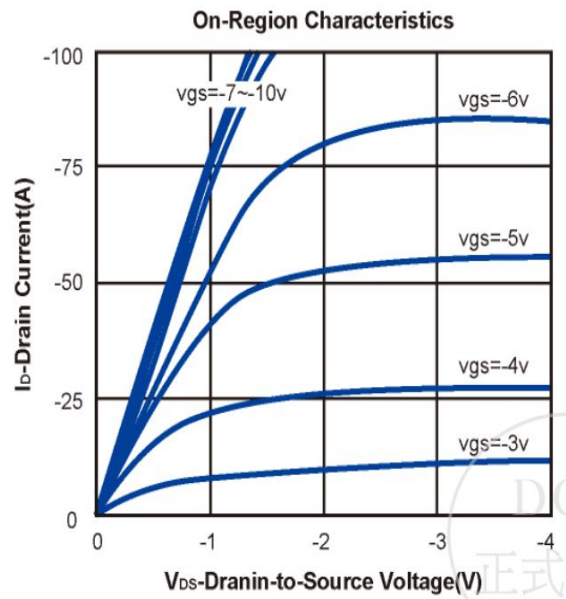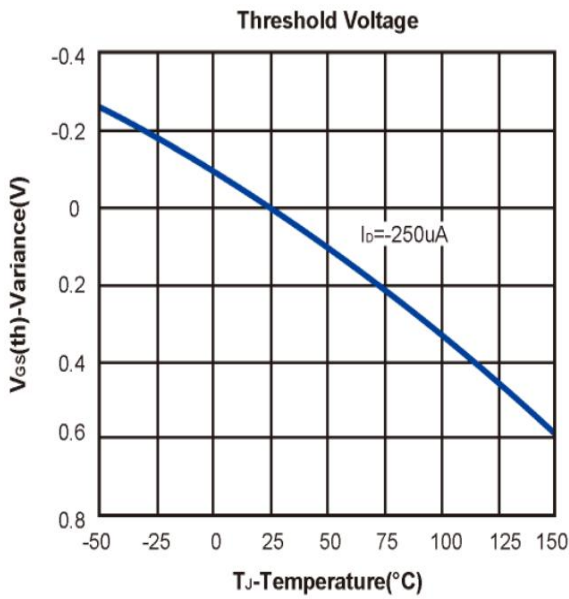


6 Typical Test Circuit and Waveform

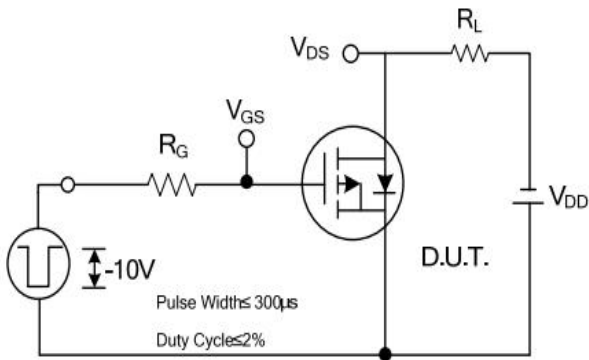


Switching Test Circuit

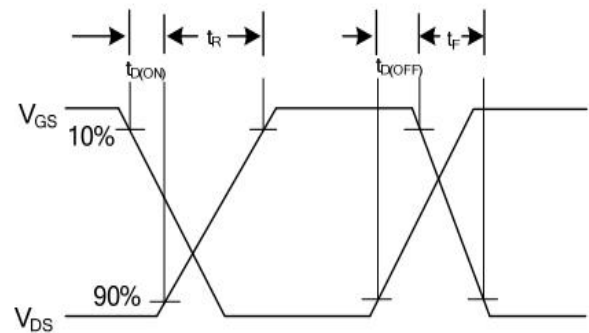


Switching Waveforms

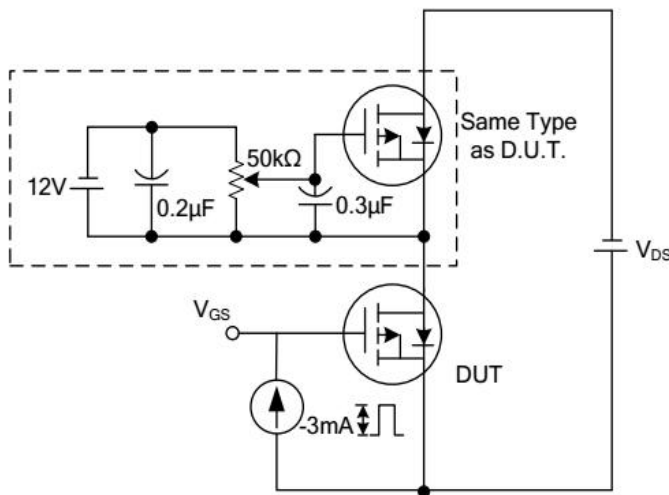


Gate Charge Test Circuit

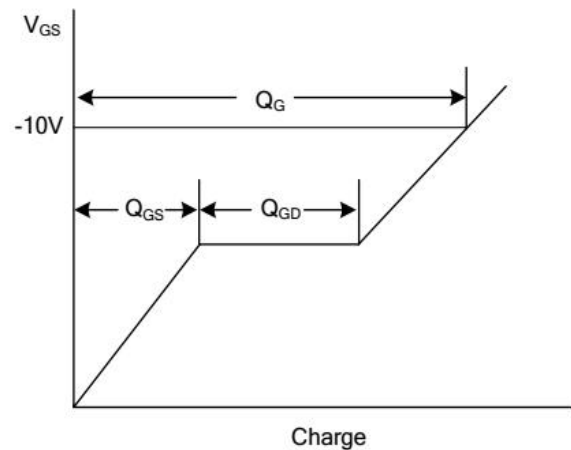

Gate Charge Waveform

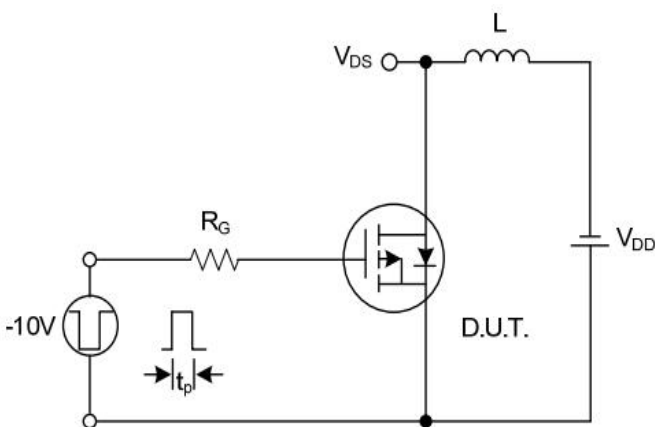


Unclamped Inductive Switching Test Circuit

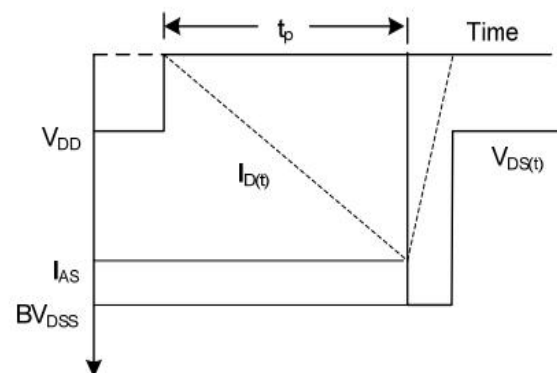

Unclamped Inductive Switching Waveforms

7 Product Names Rules

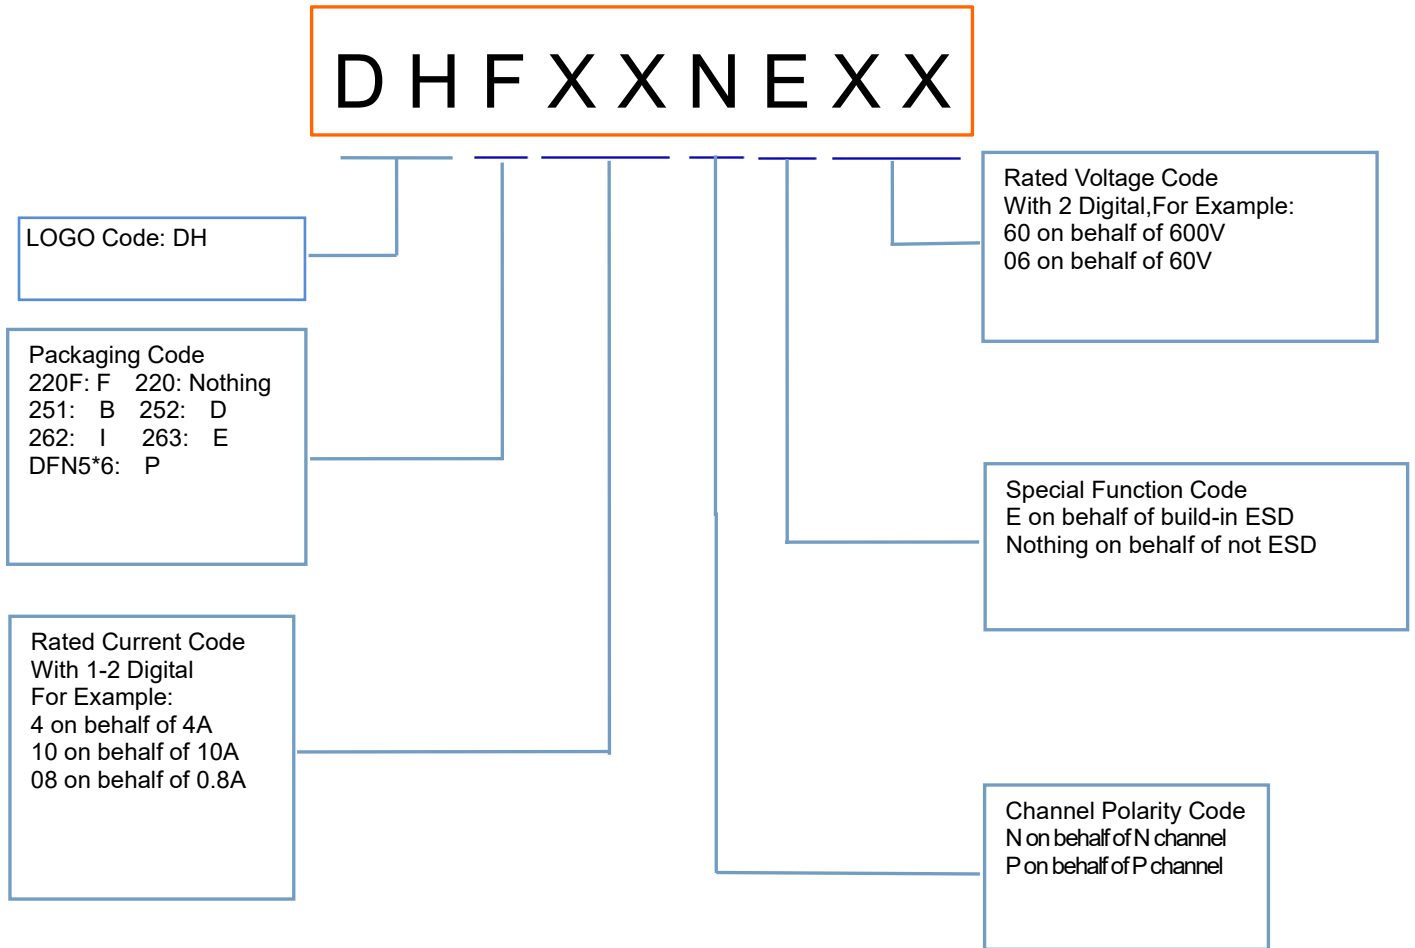


8 Product Specifications and Packaging Models

Product Model	Package Type	Mark Name	RoHS	Package	Quantity
DHP50P04	DFN5*6-8	DHP50P04	Pb-free	Tape & Reel	2500/box

9 Dimensions

PPAK5x6 PACKAGE INFORMATION

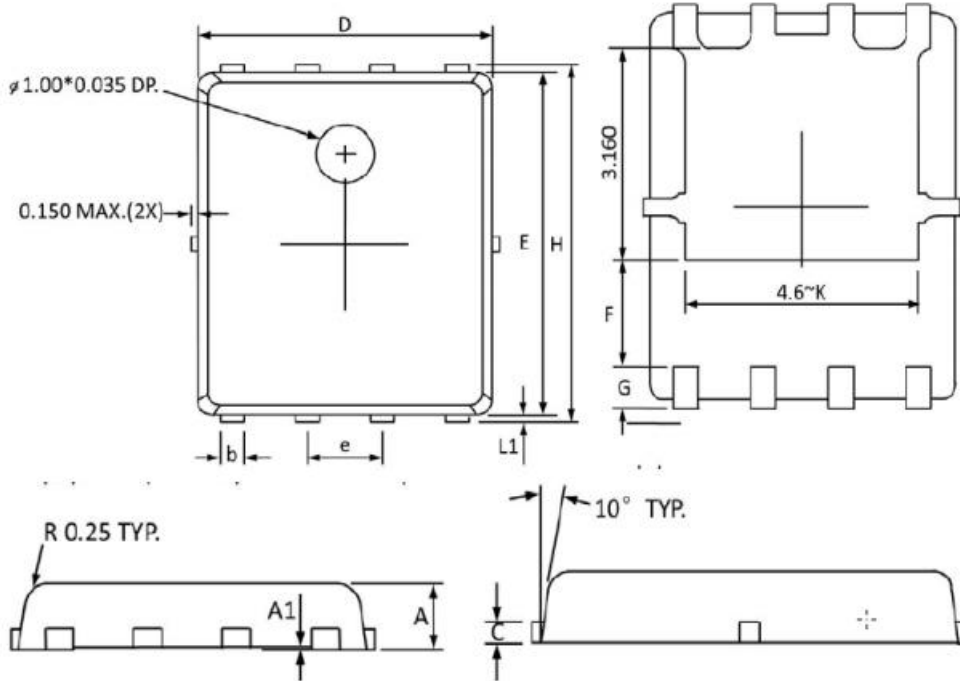

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.800	1.000	0.032	0.039
A1	0.000	0.005	0.000	0.000
b	0.350	0.490	0.014	0.019
C	0.254 Ref		0.254 Ref	
D	4.900	5.100	0.193	0.200
E	5.700	5.900	0.225	0.232
e	1.27 BSC		1.27 BSC	
F	1.600 Ref		1.600 Ref	
G	0.600 Ref		0.600 Ref	
H	5.950	6.200	0.235	0.244
L1	0.100	0.180	0.004	0.007
K	3.200 Ref		3.200 Ref	

10 Attentions

- Jiangsu Donghai Semiconductor Technology CO.,LTD. reserves the right to change the specification without prior notice! The customer should obtain the latest version of the information before making the order and verify that the information is complete and up to date.
- It is the responsibility of the purchaser for any failure or failure of any semiconductor product under certain conditions. It is the responsibility of the purchaser to comply with safety standards and to take safety measures in the system design and machine manufacturing of Donghai products in order to avoid potential risk of failure. Injury or property damage.
- Product promotion is endless, our company will be dedicated to provide customers with better products.

11 Appendix

Revision history:

Date	REV.	Description	Page
2019.12.09	1.0	Original	